

# Mono-crystalline Solar Module (60Cells)

## CEC6-60E-MV

**585~605W**  
POWER OUTPUT RANGE

**20.7%~21.4%**  
MODULE EFFICIENCY

### PRODUCT CHARACTERISTICS

- ◆ Light weight, easy to install, high cost performance, high efficiency, Low LCOE
- ◆ Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
- ◆ Guaranteed output: 0~+5W
- ◆ Excellent performance in weak light condition, such as cloudy, morning and sunset
- ◆ Independently certification by international certification authorities, include IEC61215,IEC61730,CE



### LINEAR WARRANTY AND CERTIFICATION



1st year Power output not less than 98%



Power output not less than 91.95% within 12 years




Warranty for product materials and processes within 12 years




Power output not less than 84.8% within 25 years

# QUALITY OF CENTRAL ENTERPRISE SERVICE GUARANTEE

## Assembly Drawing

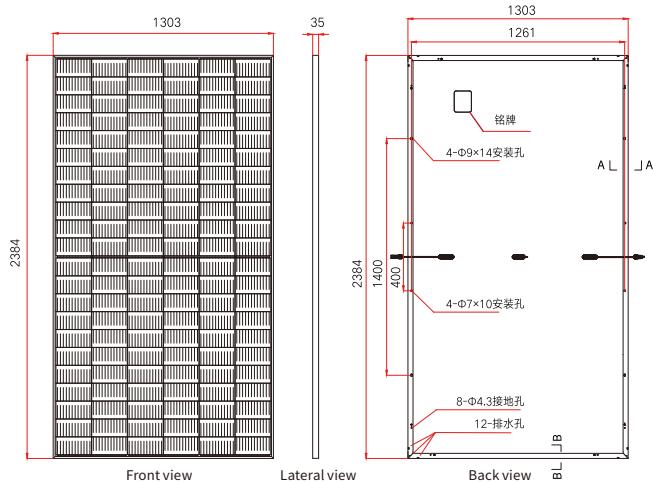

## I-V Curve (600W)

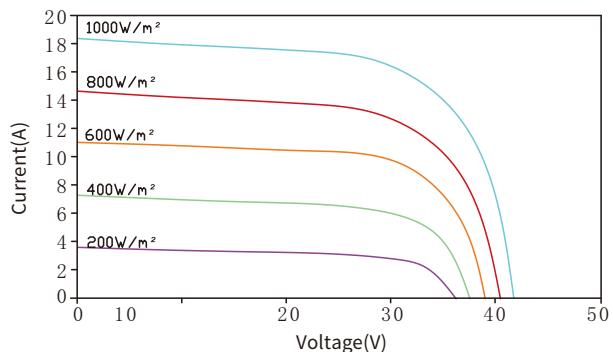

## Mechanical Characteristics

|              |  |
|--------------|--|
| Cell type    | 210*105mm monocrystalline silicon solar cells, a group of 120 cells (6*20) |
| Glass        | 3.2 mm thick low-iron tempered glass with high light transmittance         |
| Junction Box | IP Grade: IP68   |

## Temperature Rating

|  |           |
|--|-----------|
| Nominal Module Operating Temperature (NMOT)                            | 42°C ±2°C |
| Maximum Power (Pmax) Temperature Coefficient ( $\delta$ (%/°C))        | -0.34     |
| Open-circuit voltage (Voc) Temperature coefficient ( $\beta$ (%/°C))   | -0.26     |
| Short circuit current (Isc) Temperature coefficient ( $\alpha$ (%/°C)) | 0.05      |

## Limit Parameters

|                             |                |
|-----------------------------|----------------|
| Operating temperature       | -40°C to +85°C |
| Maximum fuse current rating | 30A            |

## Physical Parameter

|                    |                       |
|--------------------|-----------------------|
| Dimension          | 2172*1303*35mm        |
| Mounting hole size | 400*1261, 1400*1261mm |
| Cable Length       | 280mm; Customizable   |
| Weight             | 30.9Kg                |

## Mode of Packing

|               |                      |               |
|---------------|----------------------|---------------|
| 13.5m flatcar | Pieces per case      | 31 pcs/case   |
|               | Quantity per pallet  | 2 case/pallet |
|               | Pieces per container | 680pcs        |

## Parameters of Module

| Electrical parameters (Standard test condition) | CEC6-60E-585MV | CEC6-60E-590MV | CEC6-60E-595MV | CEC6-60E-600MV | CEC6-60E-605MV |
|---|----------------|----------------|----------------|----------------|----------------|
| Maximum power-Pmax(Wp)                          | 585            | 590            | 595            | 600            | 605            |
| Maximum operating voltage -Vmp(V)               | 33.8           | 34.0           | 34.2           | 34.4           | 34.6           |
| Maximum operating current -Imp(A)               | 17.31          | 17.36          | 17.40          | 17.45          | 17.49          |
| Open-circuit voltage -Voc(V)                    | 40.9           | 41.1           | 41.3           | 41.5           | 41.7           |
| Short-circuit current-Isc(A)                    | 18.37          | 18.42          | 18.47          | 18.52          | 18.57          |
| Maximum system voltage -Vdc(V)                  | 1000/1500      | 1000/1500      | 1000/1500      | 1000/1500      | 1000/1500      |
| Module efficiency(%)                            | 20.7%          | 20.8%          | 21.0%          | 21.2%          | 21.4%          |
| Power tolerance(W)                              | 0/+5W          | 0/+5W          | 0/+5W          | 0/+5W          | 0/+5W          |

Measured values under STC (temperature 25°C, air quality AM1.5, irradiance 1000W/m<sup>2</sup>)



让发电更加绿色 / Make Power Generation More Green

江苏省镇江市新区北山路9号/No.9,Beishan Road,New District,Zhenjiang,jiangsu  
网址/Web: www.cecpsolar.com

